

GD27 Series Smart VFDs



Contents

About us	1
Product introduction.....	2
Product application.....	3
Product characteristics.....	4
Technical parameters.....	7
Wiring.....	8
Model description.....	9
Reactor & filter model selection.....	10
Accessory model selection.....	10
Mounting method	11
INVT marketing service network	12

About us

INVT (Shenzhen INVT Electric Co., Ltd) has been concentrating on industry automation and energy power since its foundation in 2002 and is committed to "Providing the best product and service to allow customers more competitiveness". INVT goes public in 2010 and is the first A-share listed company (002334) in Shenzhen Stock Exchange in the industry. At present, INVT owns 15 subsidiaries and more than 4000 employees, over 40 branches, forming a sales network covering more than 100 overseas countries and regions.

INVT has been awarded as the Key High-tech Enterprise of National Torch Plan based on mastering of key technologies in power electronics, auto control and IT. With business covering industry automation, electric vehicle, network power and rail transit, INVT has established 11 R&D centers nationwide, boasts more than 1400 patents and owns the first lab in the industry awarded ACT qualification from TÜV SÜD, UL-WTDP and CNAS National Lab. The industrial

parks in Shenzhen and Suzhou aim to provide customers with advanced integrated product development design management, comprehensive product R&D test and auto informational production. The worldwide INVT branches and warranty service centers are ready to offer customers all-around back-ups including professional solutions, technical trainings and service support.

In the next decade, INVT will continue to take "Sincere Virtuous, Professional Aspiring" as our business philosophy, enhance core business sectors including industrial automation, electric vehicle, network power and rail transit based on the three major technologies in industry automation and energy power fields, and strive to become a leading, responsible and harmonic international professional group armed with proper product structure, leading technologies, efficient management, robust profitability and superior competitiveness.

Industrial Park in Suzhou

Group's core industrial base and R&D center in East China



Industrial Park in Guangming Shenzhen

Group's core industrial base and R&D center in East China



Product introduction



Smart VFDs drive a better future

GD27 is a newly designed smart VFD, in compact structure, with excellent performance and rich functions, simple and easy to use. It can be widely used in industries such as woodworking, textiles, food, printing and packaging, plastics, HVAC, logistics and transportation equipment.

Power range:
 AC 1PH 200V~240V 0.4kW~2.2kW
 AC 3PH 200V~240V 0.4kW~4kW
 AC 3PH 380V~480V 0.75kW~7.5kW

Characteristics	Advantages
Embedded EMC filter ¹⁾	Compliant with EN/IEC61800-3 C3
Embedded STO function ¹⁾	Compliant with EN/IEC61800-5-2 SIL2
Compact bookstyle design	Support for side-by-side mounting, saving cabinet space
Push-in spring-loaded control terminals	Tool free wiring, saving 50% of wiring time
Support for DIN rail mounting ²⁾	Making disassembly and assembly easy, saving time and effort
Natural cooling (frame A)	Without noise, good environment adaptability
Support for parameter copying keypads	Facilitating batch operation and maintenance
Standard models and EU models available	Wide range of models for selection, saving procurement cost
Support for IM and PM motors	Enabling customers to select motors as required
Enhanced circuit board coating	Improving reliability in hostile environments
Pluggable fan	Easy to maintain
Embedded braking unit	No external configuration need, saving cost

¹⁾ The EU models have been embedded with STO and EMC filters as standard configuration.

²⁾ The DIN rail mounting bracket is optional. Only frames A and B support DIN rail mounting.

Product application

Woodworking machinery



Carton machinery



Food machinery



Logistics conveyor line



Textile machinery



Plastic machinery



Stone machinery



Optical devices



Product characteristics

Excellent performance

New generation of motor control platform

Capable of driving asynchronous motors and permanent magnet synchronous motors, supporting SVC and V/F control methods.



Supporting long motor cables

Supporting up to 150m motor cable applications without the need of additional output reactors.




Outstanding torque control

Torque control accuracy < 5%
Torque response time < 10ms




Transient power loss ride-through

When the power grid drops suddenly, the VFD can keep running with the feedback energy within valid time. This function is particularly applicable to scenarios with high requirements for equipment operation continuity.

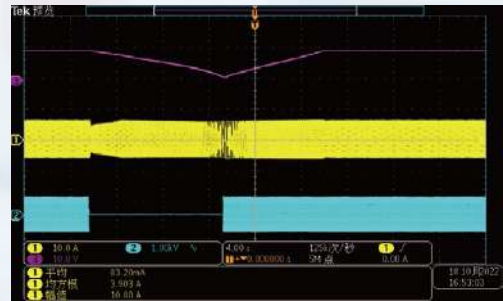


Remarkable load carrying capability at low frequency

Current waveform with sudden 100% load at a low frequency of 0.5Hz.

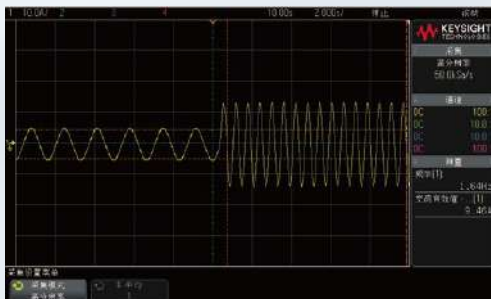

Remarkable load carrying capability at high frequency

Current and voltage waveform of motor at stable running at high frequency.

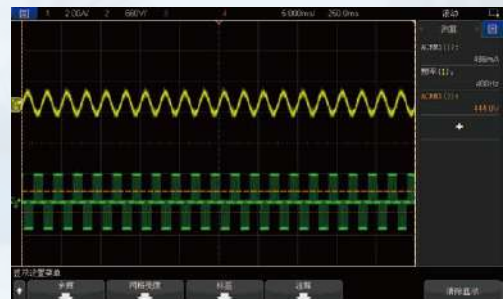

Saving time and increasing efficiency

Easy and flexible mounting

Compact bookstyle design supports side-by-side mounting, saving cabinet space and cost. Frames A and B support optional DIN rail bracket mounting.



Pluggable fan

Wireless fool-proofing design makes assembly, disassembly, and maintenance easy.



Support for external keypads

Both common LED keypads and special LED keypads with the parameter copying function are supported, facilitating batch debugging.

Using an external optional keypad mounting bracket helps monitoring from the external of cabinet.



Push-in spring loaded control terminals


Tool-free wiring, easy and fast, saving the wiring time by 50%.



Safe and reliable

Embedded safety functions

STO compliant with SIL2, which prevents the VFD from starting by mistake and enhances the safety of device maintenance and operation.

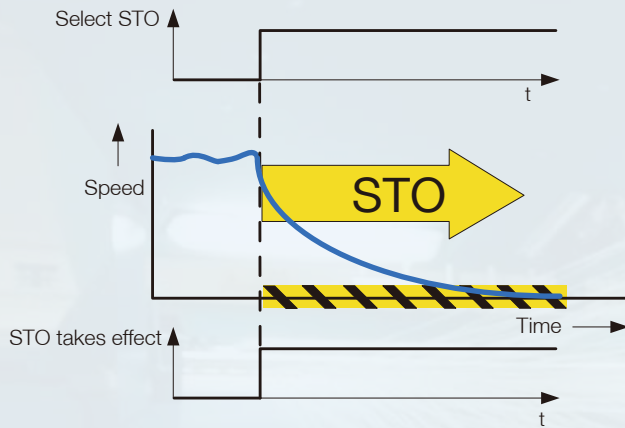


Excellent environment adaptability

Enhanced circuit board coating for reliable running under full load in an environment up to 50 °C. Independent air duct design.




Embedded EMC filter

Compliant with IEC61800-3 C2/C3, effectively reducing electromagnetic interference and ensuring stable equipment running without separate installation of external filter, with less cost.

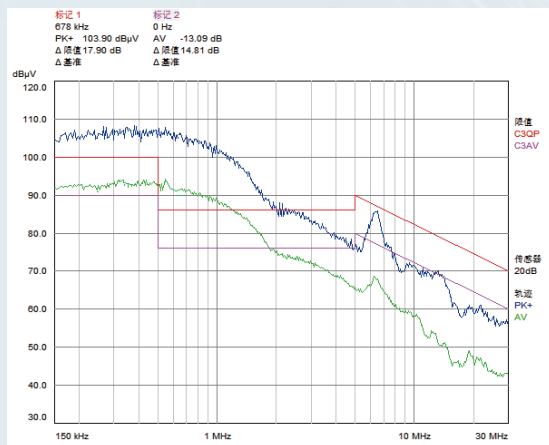

Without filter

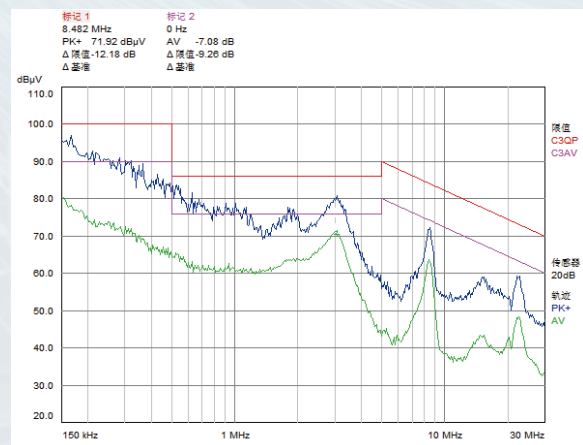

Filter embedded

Power terminal conductivity disturbance test

Note:

Embedded with C2 filters, applicable to civilian environments.
 Embedded with C3 filters, applicable to industrial environments.


Technical parameters

Item	Specifications
Input voltage	AC 1PH 200V-240V AC 3PH 200V-240V AC 3PH 380V-480V
Input frequency	50Hz or 60Hz; Allowed range: 47-63Hz
Output frequency	0-599Hz
Control mode	Space voltage vector control, and sensorless vector control (SVC)
Motor type	Asynchronous motor (AM) and synchronous motor (SM)
Speed ratio	For AMs: 1: 100 (SVC); For SMs: 1: 20 (SVC)
Speed control accuracy	±0.2% (SVC)
Speed fluctuation	±0.3% (SVC)
Torque response	<10ms (SVC)
Torque control accuracy	5% (SVC)
Starting torque	For AMs: 0.25Hz/150% (SVC); For SMs: 2.5Hz/150% (SVC)
Overload capacity	150% of the rated current for 60s, 180% of the rated current for 10s
Frequency setting method	Setting through keypad digital, analog, multi-step running, simple PLC, PID, and Modbus communication. Setting combinations and setting channels can be switched
Automatic voltage regulation	Able to keep constant output voltage even when the grid voltage changes
Fault protection	Including protection against overcurrent, overvoltage, undervoltage, overtemperature, overload, phase loss, and short circuit
Analog input	Two inputs. AI1: 0-10V/0-20mA; AI2: 0-10V
Analog output	One output. AO1: 0-10V/0-20mA
Digital input	Four regular inputs. Max. frequency: 1kHz One high-speed input. Max. frequency: 50kHz
Digital output	One Y terminal open collector output
Relay output	Two programmable relay outputs RO1A: NO; RO1B: NC; RO1C: common RO2A: NO; RO2B: NC; RO2C: common Contact capacity: 3A/AC250V, 1A/DC30V
STO input	STO redundant input, connected to the external NC contact. When the contact opens, STO acts and the VFD stops output. Safety input signal wires use shielded wires whose length is within 25m. The H1 and H2 terminals are short connected to +24V by default. Remove the jumper from the terminals before using the STO function.
Altitude	Below 1000m
Temperature of storage	-20-70°C
Temperature of running environment	-10-50°C ³⁾
RH	< 95% RH, no condensation
IP rating	IP20
Braking unit	Embedded braking unit as standard configuration
Installation method	Wall mounting, DIN rail mounting, side-by-side mounting
Cooling method	Wall mounting, DIN rail mounting, side-by-side mounting Cooling method 1PH/3PH 220V voltage class: natural cooling for 0.75kW and lower 3PH 380V voltage class: natural cooling for 1.5kW and lower Others: Forced air cooling
Certification standard	CE requirements are met

Note: Standard models have two groups of relay, while EU models have a group of relay and a group of STO function terminal.

³⁾ The highest ambient temperature is 40°C when multiple GD27 VFDs are mounted closely side by side.

Wiring

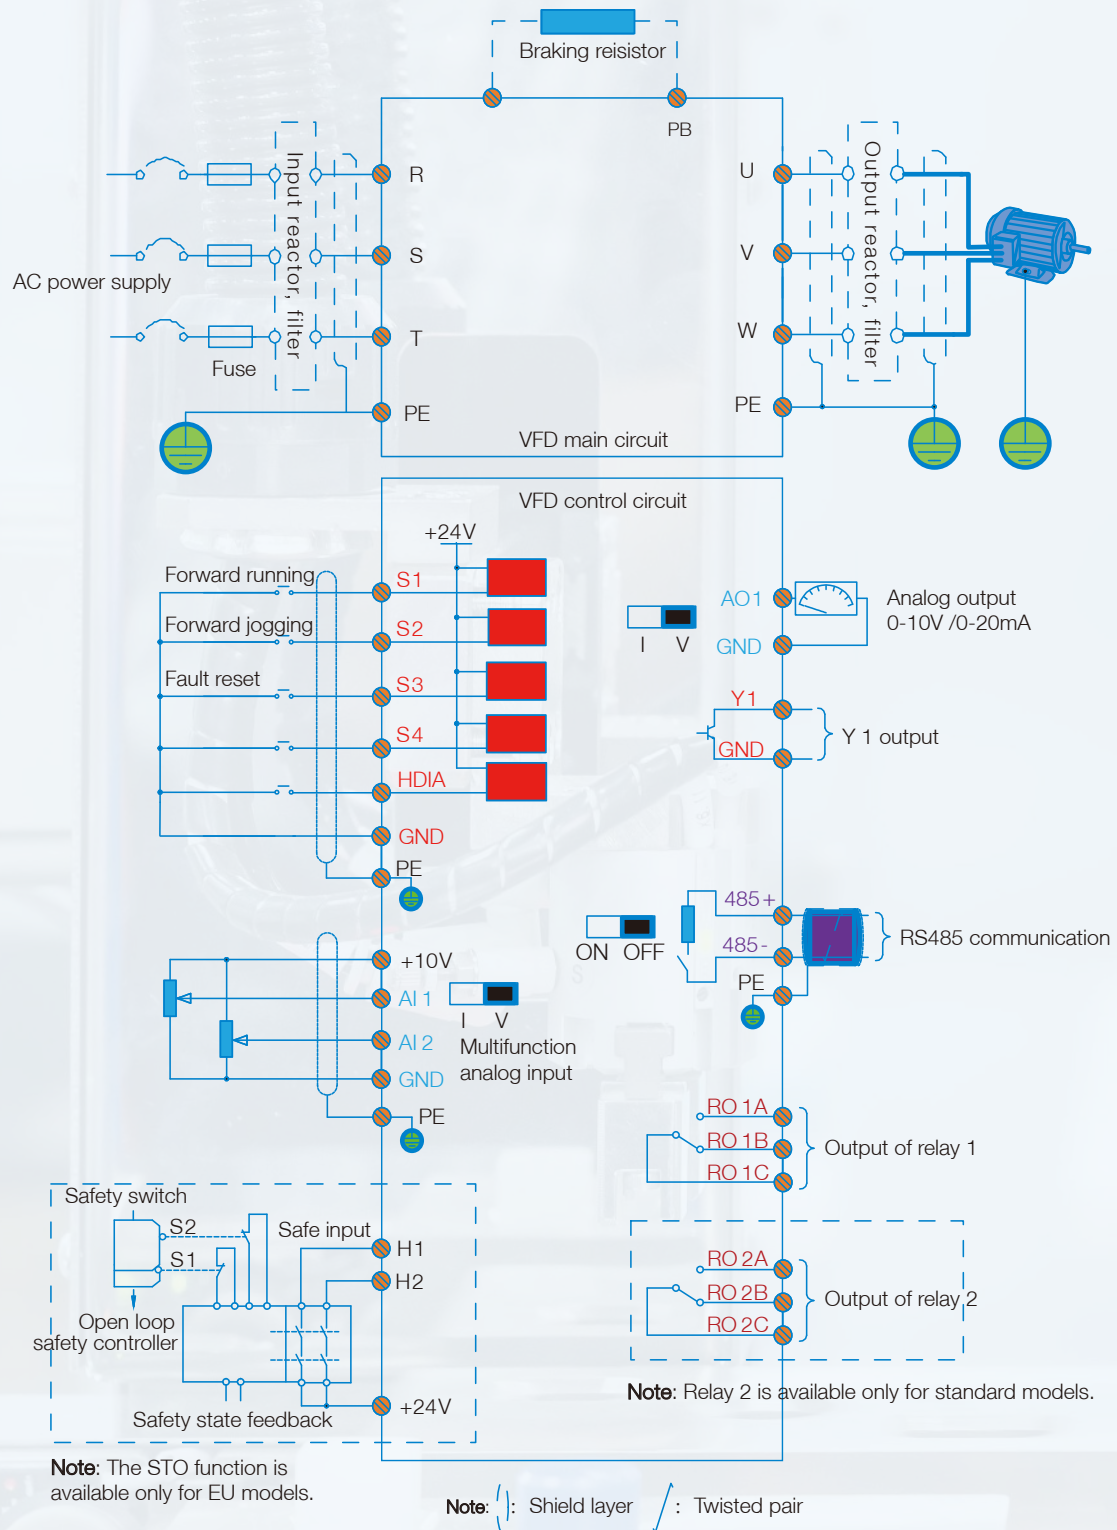

Model description

Naming rule

GD27 – 004G -4-B-EU

Field	Description
Product series abbreviation	GD27: Goodrive27 series smart VFD
Rated power	004: 4kW G: Constant torque load
Voltage class	S2: AC 1 PH 200V~240V 2: AC 3 PH 200V~240V 4: AC 3 PH 380V~480V
Braking unit	Empty: No braking unit embedded G: Constant torque load B: Braking unit embedded
Management no	Empty: Neither STO nor EMC filter embedded EU: STO and EMC filter embedded

Product model selection

VFD model	Output power (kW)	Input current (A)	Output current(A)	Exterior frame
AC 1PH 200V~240V				
GD27-0R4G-S2-B-XX	0.4	6.5	2.5	A
GD27-0R7G-S2-B-XX	0.75	11	4.2	A
GD27-1R5G-S2-B-XX	1.5	18	7.5	B
GD27-2R2G-S2-B-XX	2.2	24.3	10	B
AC 3PH 200V~240V				
GD27-0R4G-2-B-EU	0.4	3.6	2.5	A
GD27-0R7G-2-B-EU	0.75	7	4.2	A
GD27-1R5G-2-B-EU	1.5	11.6	7.5	B
GD27-2R2G-2-B-EU	2.2	16	10	B
GD27-004G-2-B-EU	4	22.3	16	C
AC 3PH 380V~480V				
GD27-0R7G-4-B-XX	0.75	4.5	2.5	A
GD27-1R5G-4-B-XX	1.5	6.5	3.7	A
GD27-2R2G-4-B-XX	2.2	8.8	5.5	B
GD27-003G-4-B-XX	3	12.2	7.5	B
GD27-004G-4-B-XX	4	15.6	9.5	B
GD27-5R5G-4-B-XX	5.5	22.3	14	C
GD27-7R5G-4-B-XX	7.5	28.7	18.5	C






Note: -XX indicates empty or -EU. -EU indicates the STO and EMC filter have been embedded.

Reactor & filter model selection

VFD	Reactor		Filter	
	Input reactor	Output reactor	Input filter	Output filter
GD27-0R4G-S2-B-XX	/	/	FLT-PS2010H-B	FLT-L04006L-B
GD27-0R7G-S2-B-XX	/	/		
GD27-1R5G-S2-B-XX	/	/		
GD27-2R2G-S2-B-XX	/	/	FLT-PS2025L-B	FLT-L04016L-B
GD27-0R4G-2-B-EU	ACL2-1R5-4	OCL2-1R5-4	FLT-P04006L-B	FLT-L04006L-B
GD27-0R7G-2-B-EU	ACL2-1R5-4	OCL2-1R5-4		
GD27-1R5G-2-B-EU	ACL2-004-4	OCL2-004-4	FLT-P04016L-B	FLT-L04016L-B
GD27-2R2G-2-B-EU	ACL2-004-4	OCL2-004-4		
GD27-004G-2-B-EU	ACL2-5R5-4	OCL2-5R5-4	FLT-P04032L-B	FLT-L04032L-B
GD27-0R7G-4-B-XX	ACL2-1R5-4	OCL2-1R5-4		
GD27-1R5G-4-B-XX	ACL2-1R5-4	OCL2-1R5-4	FLT-P04006L-B	FLT-L04006L-B
GD27-2R2G-4-B-XX	ACL2-2R2-4	OCL2-2R2-4		
GD27-003G-4-B-XX	ACL2-004-4	OCL2-004-4	FLT-P04016L-B	FLT-L04016L-B
GD27-004G-4-B-XX	ACL2-004-4	OCL2-004-4		
GD27-5R5G-4-B-XX	ACL2-5R5-4	OCL2-5R5-4	FLT-P04016L-B	FLT-L04016L-B
GD20-7R5G-4-B-XX	ACL2-7R5-4	OCL2-7R5-4	FLT-P04032L-B	FLT-L04032L-B


Note: -XX indicates empty or -EU. -EU indicates the STO and EMC filter have been embedded.

Accessory model selection

Common keypad	Keypad with parameter	Keypad bracket 1	Keypad bracket 2	DIN rail mounting bracket
				
Order No. (with packaging): 11022-00121 Function: The LED keypad can be mounted externally.	Order No.(with packaging): 11022-00129 Function: The LED keypad can be mounted externally and can be used to upload and download parameters, facilitating commissioning.	Order No.(with packaging): 61001-00090 Function: It is used to fix the LED keypad when the LED keypad is mounted to the electrical cabinet.	Order No.(with packaging): 11022-00136 Function: It is used to fix the LED keypad when the LED keypad is mounted to the electrical cabinet. The keypad can be removed from the bracket directly.	Order No.(with packaging): 11091-00014 Function: It is used for DIN rail mounting, facilitating the mounting efficiency.

Mounting method

Wall mounting

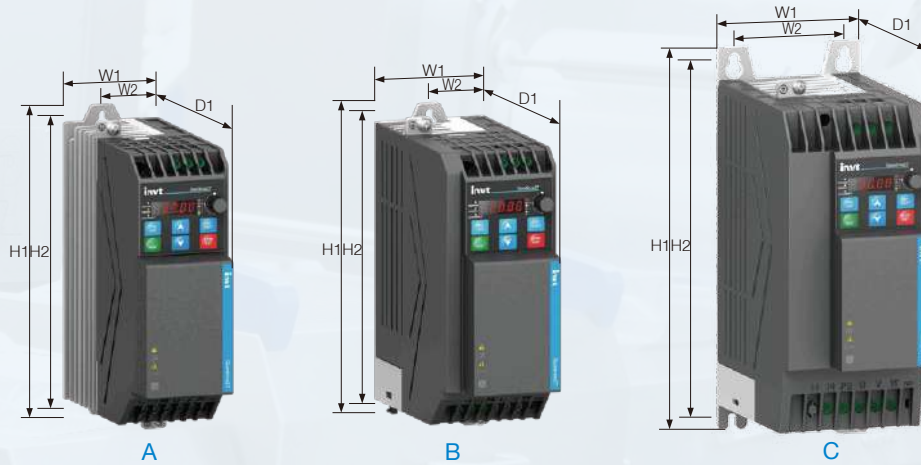


Wall mounting dimensions (unit: mm)

VFD model	Outline dimensions (mm)			Mounting hole distance (mm)		Mounting hole diameter (mm)	Frame
	W1	H1	D1	W2	H2		
GD27-0R4G-S2-B-XX	60	190	155	36	180	Ø 5	A
GD27-0R7G-S2-B-XX	60	190	155	36	180	Ø 5	A
GD27-1R5G-S2-B-XX	70	190	155	36	180	Ø 5	B
GD27-2R2G-S2-B-XX	70	190	155	36	180	Ø 5	B
GD27-0R4G-2-B-EU	60	190	155	36	180	Ø 5	A
GD27-0R7G-2-B-EU	60	190	155	36	180	Ø 5	A
GD27-1R5G-2-B-EU	70	190	155	36	180	Ø 5	B
GD27-2R2G-2-B-EU	70	190	155	36	180	Ø 5	B
GD27-004G-2-B-EU	90	235	155	70	220	Ø 5	C
GD27-0R7G-4-B-XX	60	190	155	36	180	Ø 5	A
GD27-1R5G-4-B-XX	60	190	155	36	180	Ø 5	A
GD27-2R2G-4-B-XX	70	190	155	36	180	Ø 5	B
GD27-003G-4-B-XX	70	190	155	36	180	Ø 5	B
GD27-004G-4-B-XX	70	190	155	36	180	Ø 5	B
GD27-5R5G-4-B-XX	90	235	155	70	220	Ø 5	C
GD20-7R5G-4-B-XX	90	235	155	70	220	Ø 5	C


Note: -XX indicates empty or -EU. -EU indicates the STO and EMC filter have been embedded.

INVT marketing service network

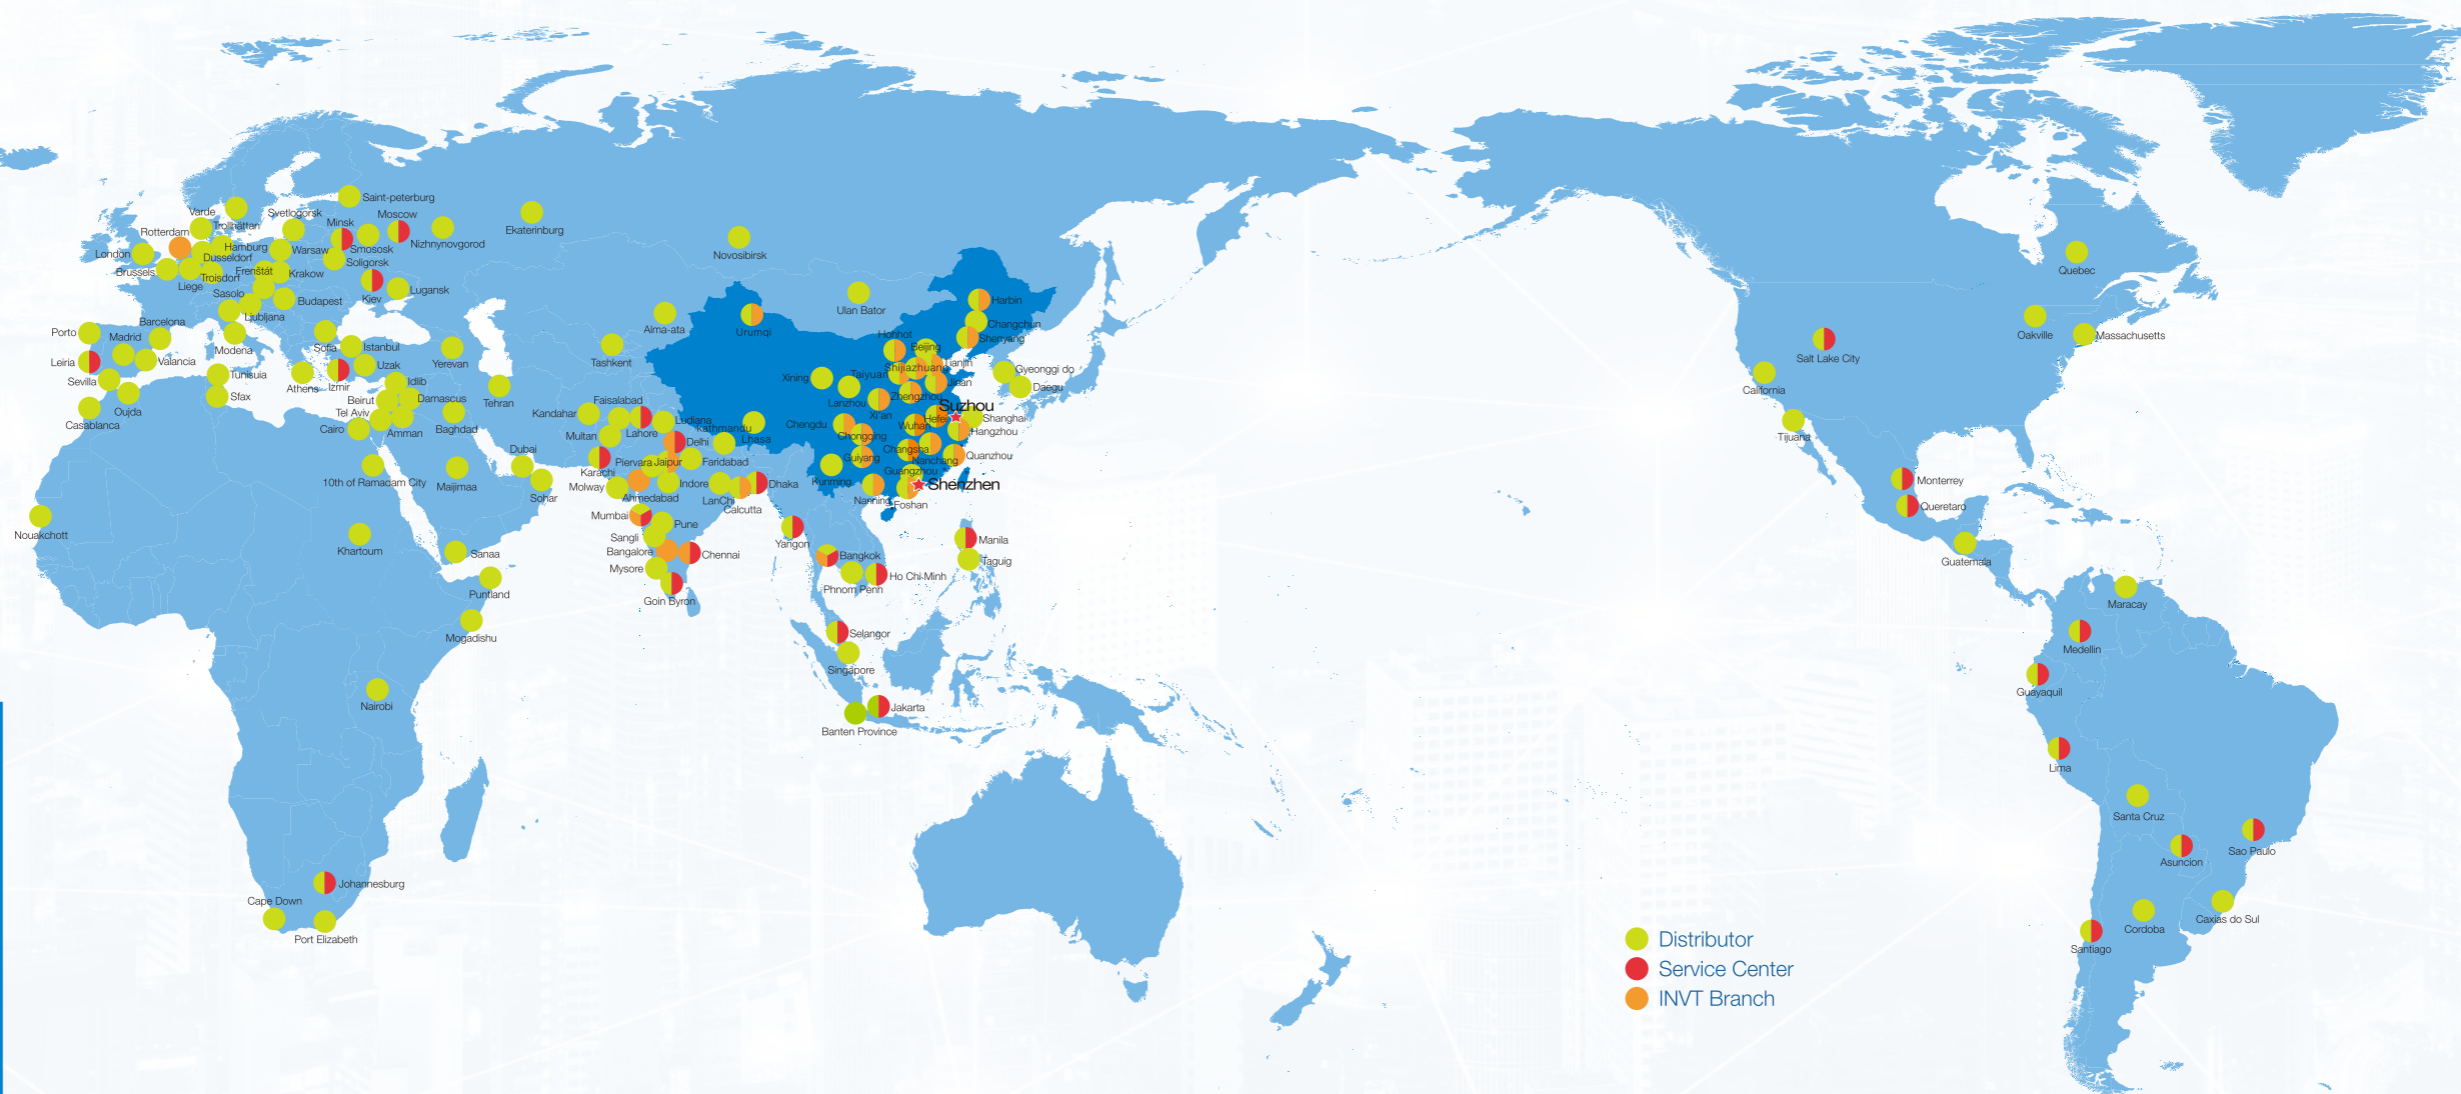

Factories* **3**
 Headquarter in Shenzhen
 Overseas Subsidiaries and offices* **8**
 More than **100** Overseas Partners

Your trusted industry automation solution provider

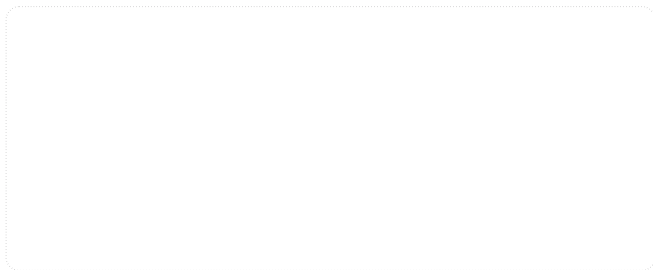

E-mail: overseas@invt.com.cn Website: www.invt.com

SHENZHEN INVT ELECTRIC CO.,LTD. INVT Guangming Technology Building, Songbai Road, Matian, Guangming District, Shenzhen, China

- Industrial Automation:
- HMI
 - PLC
 - VFD
 - Servo System
 - Elevator Intelligent Control System
 - Rail Transit Traction System
- Electric Power:
- UPS
 - DCIM
 - Solar Inverter
 - New Energy Vehicle Powertrain System
 - New Energy Vehicle Charging System
 - New Energy Vehicle Motor

INVT Copyright.
Information may be subject to change without notice during product improving.

66003-00303 202308(V1.0)